

OXYGEN v2

Please read this instruction manual carefully before using this product.
Be sure to save these instructions for future reference.

G&G
guzzie+GUSS

Thank you for purchasing the guzzie+Guss Oxygen v2 stroller. Given all products out there, choosing the right stroller to fit your needs can be a challenge and we are honored that you have decided to go with guzzie+Guss. We are committed to producing quality products that offer clever solutions, and are easy to use, so that you can focus on having fun! Please do feel free to reach out to us with any questions, comments, or if you need assistance with your guzzie+Guss stroller.

IMPORTANT

It is important that you read and follow the instructions in this manual. Please ensure that all parts are properly attached and moving parts are in working order. Please pay special attention to the system of opening and closing the stroller.

Read all warnings and safety precautions before using.

Having read and followed all instructions in this manual, please keep it in a safe place to review if necessary. If you have a problem with the assembly of the stroller or use, please contact guzzie+Guss at info@guzzieandguss.com.

A member of our team will be very happy to help you. You will be asked to provide us the serial number and date of manufacture; this information can be found on the frame of your stroller.

! WARNINGS

Please note the following to ensure safe use of your stroller

- Never leave child in the stroller unattended.
- Care must be taken when folding and unfolding the product to prevent finger entrapment.
- To avoid entrapment or pinching, do not fold or unfold stroller when child is in or within reach of the stroller.
- To avoid serious injury from falling or sliding out, always use harness to secure your child.
- Child may slip into leg openings and strangle. Never use in reclined carriage position(s) unless using the safety harness and the footrest enclosure.
- When using the stroller seat from birth to 4 months, always use the footrest enclosure or an infant car seat that is properly attached to the stroller.
- Do not exceed the infant carseat manufacturer's maximum weight limit when using an infant car seat with the stroller.
- Do not use stroller with a child who weighs more than 50 lbs (22.5 kg).
- Do not use stroller with a child taller than 40 inches (101 cm).
- Do not overload basket – Maximum weight in basket is 20 lbs (9 kg).
- Do not overload the stroller, it may become unstable. Max load is 50 lbs (22.5 kgs).
- Overloading the basket may cause the stroller to become unstable.
- Always make certain that the stroller is fully open and locked in the open position before use.
- Do not hang or place items such as bags or parcel racks if on the stroller handle or frame (except for those approved by guzzie+Guss). They may cause the stroller to become unstable.
- The stroller will become unstable if a parcel bag or parcel rack is being used when there is no provision for one
- Do not allow children to climb on or play with the stroller.
- Never use stroller on stairs or escalators
- This stroller is intended for walking speed only. Do not use while jogging, skating, etc.
- Always set the brake when stroller is not moving.
- Only use accessories and replacement parts approved by guzzie+Guss
- Read these instructions before using this product.
- To ensure proper use, store this user guide in a convenient place so it can be consulted.
- Failure to follow all warnings and instructions could result in serious injury or death.
- Do not use this stroller if there are any broken or missing parts.

WHAT IS IN THE BOX



Stroller frame



Bumper bar



Front wheels (2)



Rear wheels (2)



Car seat strap adapters



Travel bag

ASSEMBLY

Opening the frame

1. To open the frame, locate the sliding button on the handle bar, then first slide the button to the left.



2. While holding the position, squeeze the trigger.



3. Continue pulling the frame upwards to open.



NOTE: Test that the stroller is properly locked open by pushing down on the handle.

ASSEMBLY

Front wheels

1. To attach the front wheels, insert the axle into the front wheel housing. The wheel will click when it is properly inserted. Repeat on the other side.




2. To remove the front wheels, (a) push in the release button, and (b) slide out the wheel.




Rear Wheels

1. To attach the rear wheels, insert the axle (D shaped angle) into the rear wheel housing. The wheel will click when properly inserted. Repeat on the other side.

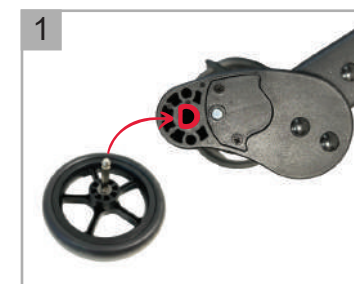

2. To remove the rear wheels, (a) push in the release button, and (b) slide out the wheel.

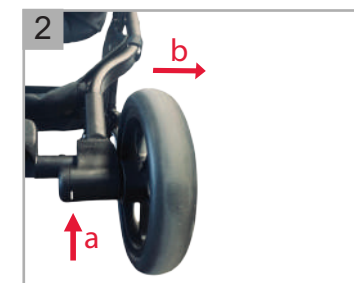

NOTE: This only needs to be done for repair or maintenance purposes as you should remove the wheels to clean and lubricate them.

ASSEMBLY

Bumper bar

1. To attach the bumper bar, line the bumper bar up with the receptacles on either side of the stroller seat, and push both sides into them. Each side will click into place when properly attached.

To confirm the bar is properly attached try pulling the bar away from the seat.



2. To remove the bumper bar, find the release button on the underside of the receptacles, push in and pull the bar out.



USING YOUR STROLLER

Opening

To open the stroller, first slide the button to the left, and while holding the position, squeeze the trigger and pull the frame upwards to open. (Steps 1 & 2, as describe in page 4)

NOTE: Test that the stroller is properly locked open by pushing down on the handle.



IMPORTANT: Before and during use, always make sure the child's hands and feet are away from wheels.

Folding

To fold the stroller, first slide the button to the left, and while holding the position, squeeze the trigger. (Steps 1 & 2, as describe in page 4)

3. Push the frame downwards, using gravity and the frame will fold and lock automatically.



IMPORTANT: Always apply brake and remove children before folding the stroller.

Parking brake

1. To set your parking brake, push down on the brake pedal.



2. To release the parking brake, push down on the inner portion of the brake pedal.



Seat recline

1. To adjust the angle down of your seat, pull the clamp on the back of the seat and pull down to the desired position.



2. To bring your seat up, pull the strap up on the back of the seat and pull up to the desired position.



Ventilation

1. To add some ventilation, there is a flap on the back of the seat, just unzip and roll up the flap.



2. To keep it open use the toggle at the top.



Canopy

1. To open the canopy, pull the canopy toward the front of the seat. To close the canopy, push it back.



2. For added ventilation, flip the peek-a-boo window cover up.



Securing your child

1. The stroller is equipped with a magnetic 5-point harness. To use the harness, slide the waist strap buckle into the shoulder harness buckle, repeat on the other side.



2. Then bring the 2 sides together and the magnets will join them together.



3. Once they are together then bring this buckle towards the crotch strap buckle. It will automatically connect together.



4. To undo the buckle, squeeze the 2 side buttons towards the center of the harness, and pull the buckle apart.



5. The shoulder harness is adjustable in height and can be changed by unthreading the shoulder strap from its current position and rethreading it through the shoulder belt positioning slot at the desired height.



6. The length of the shoulder straps can also be changed by sliding the buckle on each shoulder strap.




The waist belts are adjustable on either the right or left by using the adjustment buckles on the waist strap.

7. The length of the crotch strap can be changed by sliding the buckle on the crotch strap.



8. Harness pads are attached using snap buttons. To remove them, unsnap the button.

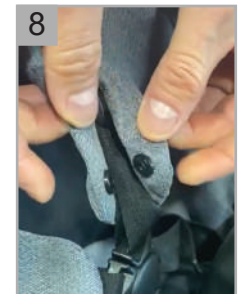

USING YOUR STROLLER

Footrest

1. To adjust the footrest position, pull the buttons inside of each side of the footrest, then lower the footrest.

To raise the footrest just lift the footrest up, it will lock into place.



Footrest enclosure

1. Under the footrest there is a flap of material on either side.



2. These will be able to be snapped onto the side of stroller seat to make the footrest enclosure.

NOTE: When using the stroller seat from birth to 4 months always use the footrest enclosure and have the seat fully reclined.



USING YOUR STROLLER

Car seat compatibility

The Oxygen v2 stroller has the ability to carry an infant car seat (some models may not work, please contact us for an updated list of compatible seats).



Scan QR code to see the list of compatible infant car seats with instructions.


CARE & MAINTENANCE

- Check the rivets, brakes and accessories very carefully before using this stroller.
- Stop using this product if there is any damage or broken parts or pieces.
- Lubricate all moving parts and joints with a penetrating spray lubricant, from time to time.
- Remove front and rear wheels from housings and clean thoroughly once a month.
- Clean the stroller frame by wiping with moist cloth and dry thoroughly to prevent any rusting.
- Always wipe dry your stroller after using it in the rain or in winter climates, making sure road salt is removed from frame and joints. Allow the stroller to stand in an open, warm and ventilated place to dry.
- Do not leave your stroller outside in wet or hot/sunny weather, as the fabric could mildew or fade.
- Do not leave your stroller outside in cold weather as the cold could have adverse effects on the stroller.
- Only hand-wash the fabric by using mild detergent in warm water. Do not wash in machine. Hang in a ventilated place to dry. Do not tumble dry. Do not use bleach. Do not iron.
- It may be unsafe to use accessories other than those approved by the manufacturer or distributor.
- It may be unsafe to use replacement parts other than those supplied or approved by the manufacturer or distributor.

If you have any questions regarding the product please contact guzzie + Guss at 1-888-597-0992, or online at www.guzzieandguss.com.

Additional Care instructions:

- Hand wash in cold water
- No Bleach
- Drip Dry
- Do not machine dry
- Do not Iron

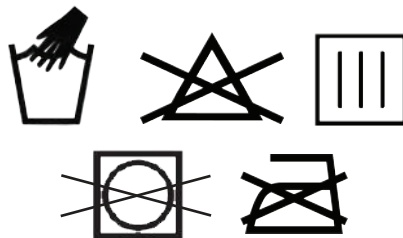

WARRANTY

Your guzzie+Guss item is warranted to be free from any manufacturing defects for 1 year from the date of purchase under normal use and in compliance with the operating instructions. This warranty cannot be extended and an extended warranty cannot be purchased. This warranty is not transferable and extends only to the original retail purchaser and is only valid when supplied with proof of purchase. PLEASE RETAIN PROOF OF PURCHASE FOR THIS LIMITED WARRANTY. The warranty is valid only in the original country of purchase (1 year on the frame and wheels, 6 months on the fabric).

This warranty is subject to the conditions set forth by country in which the items were purchased. Conditions may vary. guzzie+Guss will not ship replacement or repair parts out of the country of purchase. guzzie+Guss will provide replacement parts or conduct repairs as determined fitting by the company. guzzie+Guss reserves the right to exchange item with a replacement part. Some parts may be replaced with newer model parts as the items are improved over time. Please NOTE that all issues will NOT be covered by this warranty if it is deemed that your unit has been damaged because of misuse or neglect of regular maintenance.

Warranty is nullified if:

- The issue is caused by misuse or poor maintenance. Please refer to this instruction booklet for guidance on stroller use and maintenance.
 - Damage is caused by improper installation of guzzie+Guss parts and/or accessories. Please refer to this instruction booklet for guidance on stroller assembly and use.
 - Damage is corrosion, mold or rust caused by lack of maintenance or service.
 - Damage is due to general wear and tear, which is the result of everyday use or negligence.
 - Damage is caused by sun intensity, sweat, detergents, damp storage or frequent washings.
 - Repairs or modifications are carried out by an unauthorized third party.
 - Stroller is purchased from an unauthorized retailer. Approved retailers are listed on our website at www.guzzieandguss.com
 - Stroller is second-hand.
 - Stroller is damaged as a result of an accident, airline or freight damage.
- guzzie+Guss reserves the right to determine if warranty terms and conditions have been met. Please contact your local distributor if you have any questions regarding warranty.